



# OMNILINE IMPULSE

## OMNILINE Case/Crate Rejection System


### System Highlights



- Pneumatically Driven Rejection System
- 4" - 12" Stroke Distance
- 6" - 8" Wide Soft Rejector Pad
- Capable Of Rejecting Up To 160 Cases Per Minute
- Maximum Line Speed of 360 Feet Per Minute
- Single Actuator Minimizing Complexity and Maintenance
- Adjustable Exhaust and Input Ports for Fine Tuning
- Optional Soft Pad Available to Prevent Rejection Damage
- Includes Floor Mount and Air Controls

### Dimensions

### Specifications

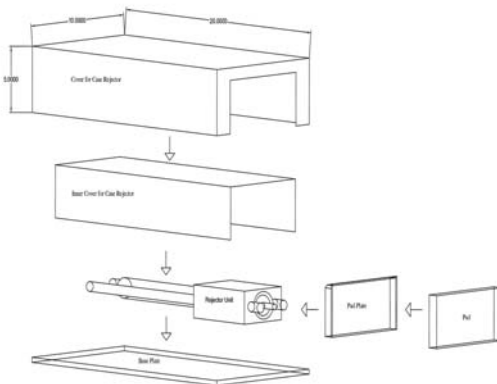

Operating Speed	Up to 160 Crates Per Min
Environmental Standards	Nema 4X/IP65
Air Requirement	60 PSI
Control Voltage	24 VDC
Materials	Stainless Steel Construction

**MANUFACTURED IN CANADA** 