



OMNILINE IMPULSE

OMNILINE HIGH PERFORMANCE REJECTION SYSTEM




System Highlights

- Omniline Low Pressure Impulse Rejector
- Low Pressure (60 PSI) High Speed (8 ms Cycle Time)
- Capable Of Rejecting Up To 1,400 Bottles Per Minute or 2600 Cans Per Minute
- Uses A Single Actuator (Only One Moving Part) Reducing Maintenance & Downtime
- Long Life Components Provide Excellent System Reliability
- Operates From Full Stop To Maximum Speed with no Performance Degradation
- Upright Rejection With Various Fill Heights
- Automatically Adjusts For Various Container Diameters
- Performs On All Container Types & Sizes
- 12 Month Full System Warranty (Including The Pad)
- Available with Soft or Hard Pad Configuration
- Complete System Includes Conveyor Mount and Air Controls



Dimensions

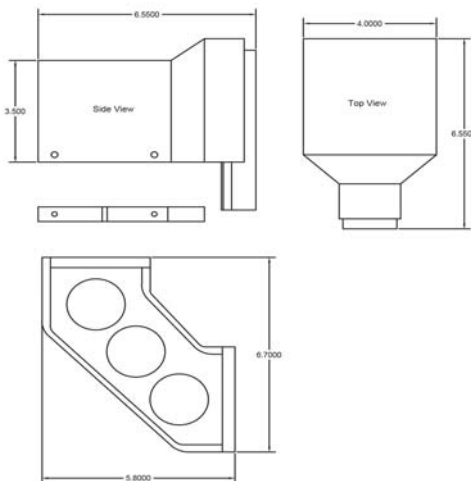

Specifications

Operating Speed	Up to 2600 CPM
Environmental Standards	Nema 4X/IP65
Air Requirement	60 PSI
Control Voltage	24VDC
Materials	Stainless Steel Construction

MANUFACTURED IN CANADA

