



Manufactured in
Canada

OMNILINE IMPULSE CASE/CRATE REJECTION SYSTEM

Pneumatically Driven Rejection System

OMNILINE IMPULSE CASE/CRATE REJECTION

System Highlights

- Pneumatically Driven Rejection System
- 4" – 12" Stroke Distance
- 6" – 8" Wide Soft Rejector Pad
- Capable of Rejecting Up to 160 Cases per Minute
- Maximum Line Speed of 360 Feet per Minute
- Single Actuator Minimizing Complexity and Maintenance
- Adjustable Exhaust and Input Ports for Fine Tuning
- Optional Soft Pad available to Prevent Rejection Damage
- Includes Floor Mount and Air Controls

Specifications

Operating Speed Up to 160 Crates per Min


Environmental Standards Nema 4X / IP65

Air Requirement 60 PSI

Control Voltage 24 VDC


Materials Stainless Steel Construction

Dimension

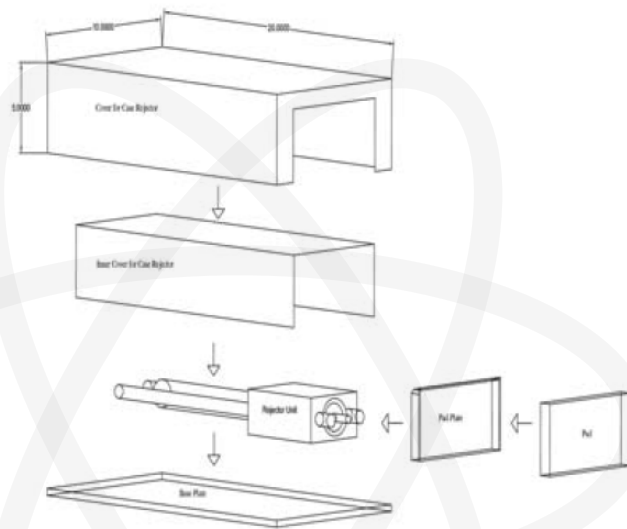

Contact Details

 Omnifission Inc.
1900 Clark Blvd, Unit 1 & 2
Brampton, ON L6T OE9

 905-405-9777

 OMNIFISSION.COM

 orders@omnifission.com