



**Manufactured  
in Canada**

# **OMNILINE IMPULSE CASE/CRATE REJECTION SYSTEM**

Pneumatically Driven Rejection System

# OMNICHECK IMPULSE

## System Highlights

- Pneumatically Driven Rejection System
- 4" – 12" Stroke Distance
- 6" – 8" Wide Soft Rejector Pad
- Capable of Rejecting Up to 160 Crates per Minute
- Maximum Line Speed of 360 Feet per Minute
- Single Actuator Minimizing Complexity and Maintenance
- Adjustable Exhaust and Input Ports for Fine Tuning
- Optional Soft Pad available to Prevent Rejection Damage
- Includes Floor Mount and Air Controls

## Specifications

**Operating Speed** Up to 160 Crates per Min

**Environmental Standards** Nema 4X / IP65


**Air Requirement** 60 PSI

**Control Voltage** 24 VDC

**Materials** Stainless Steel Construction


## Dimension

Stainless Steel Construction  
5" H x 10" W x 22" L

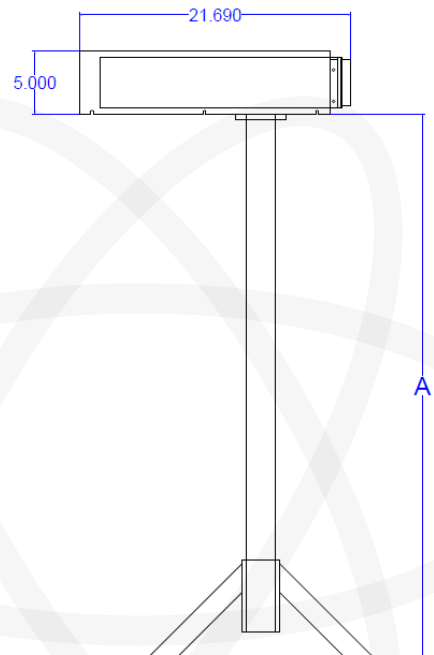

## Contact Details

 Omnifission Inc.  
1900 Clark Blvd, Unit 1 & 2  
Brampton, ON L6T OE9

 905-405-9777

 OMNIFISSION.COM

 orders@omnifission.com