



Manufactured in  
Canada


# OMNILINE HIGH PERFORMANCE REJECTION SYSTEM

Omniline Low Pressure with High Speed Impulse Rejector

# OMNILINE IMPULSE

## System Highlights

- Omniline Low Pressure impulse Rejector
- Low Pressure (50 PSI) High Speed (8 ms Cycle time)
- Capable of Rejecting Up to 2400 Containers per Minute
- Uses a Single Actuator (Only One Moving Part) Reducing Maintenance & Downtime
- High Performance Pneumatic Valve
- Long Life Components Provide Excellent System Reliability
- Operates from Full Stop to Maximum Speed with No Performance Degradation
- Upright Rejection with Various Fill Heights
- Automatically Adjusts for Various Containers Diameters
- Performs on All Container Types & Sizes without adjustment or change parts
- 12 Months Full System Warranty (Including the Pad)
- Available with Soft or Hard Pad Configuration
- Complete System Includes Conveyor Mount and Air Controls

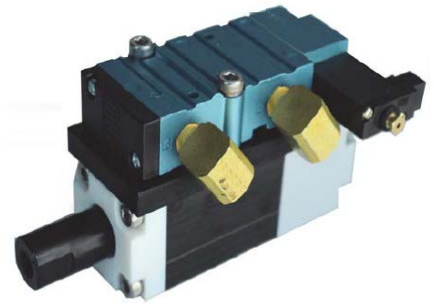

## Specifications

**Operating Speed** Up to 160 Crates per Min


**Environmental Standards** Nema 4X / IP65

**Air Requirement** 60 PSI

**Control Voltage** 24 VDC

**Materials** Stainless Steel Construction

## Dimension

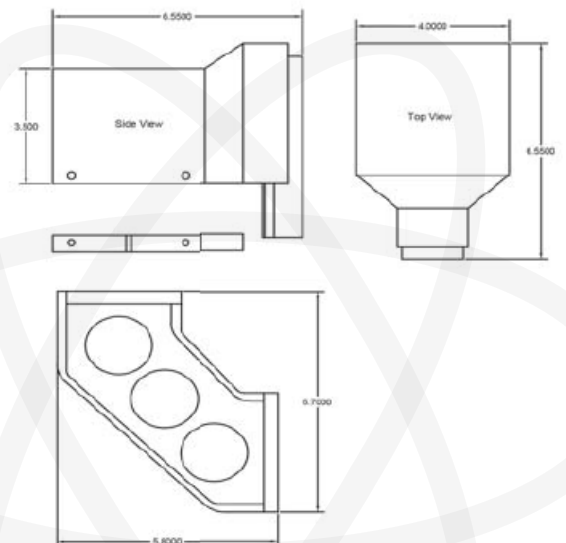

## Contact Details

 Omnifission Inc.  
1900 Clark Blvd, Unit 1 & 2  
Brampton, ON L6T OE9

 905-405-9777

 [OMNIFISSION.COM](http://OMNIFISSION.COM)

 [orders@omnifission.com](mailto:orders@omnifission.com)